

Multimedia Video Coding & Architectures (5LSE0), Module 10

MPEG-1/2 Standards: Motion-compensated video coding

Peter H.N. de With
(p.h.n.de.with@tue.nl)

slides version 1.0

5LSE0 - Mod 10 Part 1

MPEG Motion Compensation and Video Coding


MPEG Video / Temporal Prediction – (1)

Temporal redundancy reduction

- * **1. By single-sided prediction**
 - motion compensation should cover large area (due to intermediate B pictures)
 - fallback coding required (for excessive motion or uncovered background)
- * **2. Bidirectional motion compensation (interpolation)**
 - assume linear interpolation of surrounding pictures
 - bidirectional prediction is more efficient than single-sided
 - more possibilities with uncovered objects
 - not used as reference for further coding: no error propagation in temporal coding

MPEG Video / Temporal Prediction – (2)

Table of coding modes

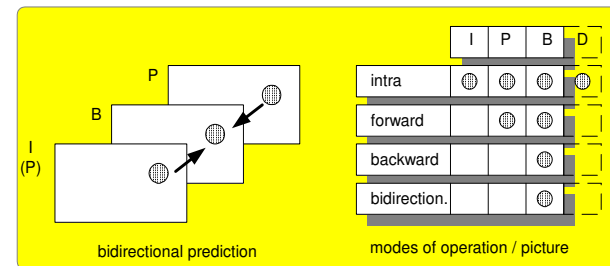

MPEG Video / Quantizer inter block – (1)

5

MPEG Quantization interframe data (predictive MBs)

* DC coefficients

- Differential DC coefficients
- Quantized and coded as AC coefficients

* AC coefficients

- MPEG-1 decoder formula
- $F(u,v) = 2 (QF(u,v) + k) q_scale W(u,v) / 16$
- $W(u,v) = 16$ default, but new matrix can be loaded
- $k = sign(QF(u,v))$ for inter-blocks
- Mismatch control: if $F(u,v)$ even $\Rightarrow F(u,v) = F(u,v) - sign(F(u,v))$ value closest to zero


MPEG Video/ Quantizer inter-blocks – (2)

6

MPEG Quantization interframe data (predictive MBs)

* AC coefficients (cont.) for MPEG-2

- MPEG-2 is more precise with normalization factor 32
- MPEG-2 special mismatch control
- Quantizer is uniform, but larger dead zone



MPEG Video / Coding modes P&B – (1)

7

MPEG-1/2 coding modes for inter-coded images (P, B)

Predictive (P)	Bidirectional (B)
Motion, no motion	Forward, from past, Backward, from future, interpolated (from both sides)
Intra (fallback), or non-intra (regular case)	Intra (fallback), or non-intra (regular case)
Coded (regular), or not-coded (skipped block)	Coded (regular), or not-coded (skipped)
Default quantization, new q-scale	Default quantization, new q-scale

MPEG Video / Coding modes P&B – (2)

8

MPEG-2 extensions for compensated coding modes

* Frame-based prediction (in both standards)

- Equal to MPEG-1 (16x16 compensation blocks)
- In a frame picture, either frame- or field-based prediction on MB level

* Field-based prediction (MPEG-2)

- Results from interlaced pictures

* 16x8 motion compensation (MPEG-2)

- Requires two motion vectors (1 for top- and 1 for bottom field)
- In B interlaced pictures, even 4 vectors can be used

MPEG Video / Modes for P&B MBs – (3)

9

MPEG-2 extensions for compensated coding modes

* Special: **Dual-prime** prediction

- 1 Motion Vector is coded in full resolution, 1 motion vector is a small differential vector (the dmV)
- **Field-based prediction:** 2 vectors are derived from this information. The obtained fields are averaged to get the final prediction
- **Frame-based pictures:** the averaging is done for both fields, yielding 4 field predictions.
- This mode is only used for P-pictures, without B-pictures in between.


MPEG Video / Modes for P&B MBs – (4)

10

MPEG-2 extensions
for compensated
coding modes

* **Frame-based prediction**

- 1 mv for P
- 2 mv for B

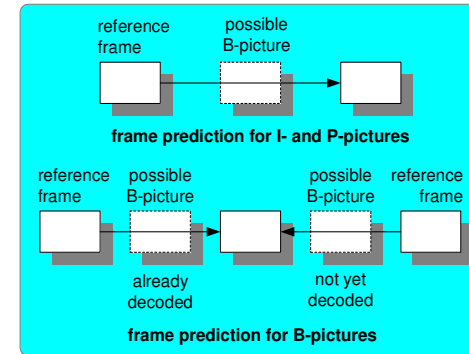


MPEG Video / Modes for P&B MBs – (5)

11

MPEG-2 extensions
for compensated
coding modes

* **Field-based prediction**

- 2 mv for field to frame for P
- 2 mv for field to field for full interlacing P

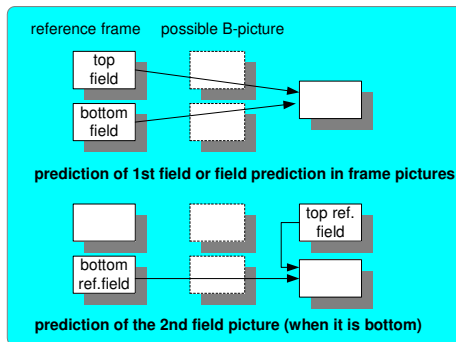


MPEG Video / Modes for P&B MBs – (6)

12

MPEG-2 extensions
for compensated
coding modes

* **Field-based prediction (continued)**

- 2 mv for P
- 4 mv for B

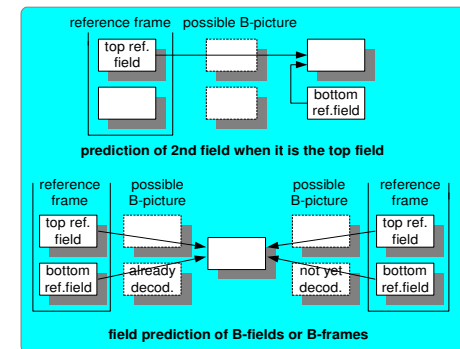


MPEG Video / Modes for P&B MBs – (7)

13

MPEG-2 extensions for MC-coding

* Special field-based prediction: dual prime

- Main and dmvc vector
- Scaling of vectors for dual prime prediction

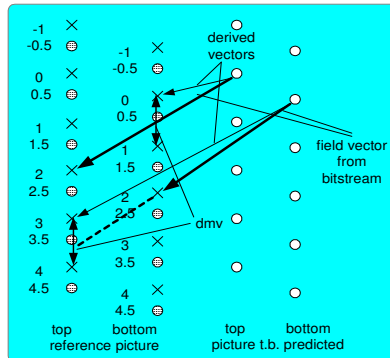


MPEG Video / Decoder structure

14

* MPEG-2 Video decoder hardware

- MPEG strongly asymmetric, follows encoder decisions
- Decoder has no ME, only MC, saves factor 3-4 in complexity

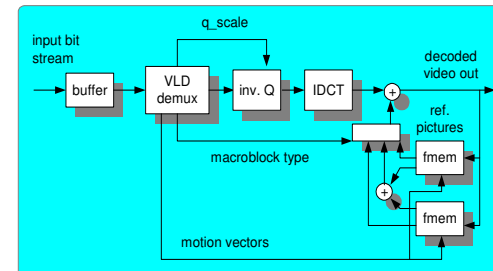

5LSE0 - Mod 10 Part 2

15

MPEG Flexibility and Programmability

MPEG Video / Flexibility parameters

16

MPEG Video: Flexibility w.r.t. system parameters

* Video sequence parameters in sequence header

- Pixels/line, lines per picture
- Pixel aspect ratio
- Frame rate, bit rate
- Required buffer size

* Conclusion MPEG-1

- MPEG allows for a wide range of input formats
- However, MPEG-1 is tuned to be optimal for 1.5 Mbit/s bit rate, spatial resolutions of approx. 350x250 pixels, picture rate of 20-30 frame/s, and non-interlaced pictures

MPEG Video / MPEG-1 core param'ts

17

- * **MPEG Video core parameters, purpose**
 - guaranteed exchange of MPEG-coded data, which should be decodable on different systems
 - also important: bounding of encoder complexity
- * **MPEG-1 Core parameters**
 - Pixels/line ≤ 720
 - Lines/frame ≤ 576
 - Frame rate ≤ 30 Hz
 - Macroblock/picture ≤ 396
 - Macroblock rate $\leq 396 \times 25$ Hz = 330×30 Hz = 9,900 Hz
 - Bit rate ≤ 1.86 Mbit/s
 - Buffer $\leq 376,832$ bits



PdW / 2017
Fac. EE SPS-VCA

Multimedia Video Coding & A / 5LSE0 /
Module 10 MPEG Mot.-Comp. Coding



MPEG Video / Flexibility Layer Level

18

- * **GOP**
 - Frame structure I,B,P, and GOP size
- * **Frame types**
 - Intraframe I, predictive P, bidirectional B
- * **Slice**
 - Slice size, fixed/adaptive partitioning, quantization block/size
- * **Macroblock coding**
 - Coded/skipped, motion/ no motion, intra or predicted
- * **Macroblock quantization**
 - Adaptive or default, weighting function default or adaptive
- * **Motion vectors**
 - One-sided, two-sided, motion estimation algorithm



PdW / 2017
Fac. EE SPS-VCA

Multimedia Video Coding & A / 5LSE0 /
Module 10 MPEG Mot.-Comp. Coding



MPEG Video / MPEG-2 Flexibility – (1)

19

- * **MPEG-2 extensions on flexibility**
 - MPEG-2 should give a more generic set of tools for a wider range of applications
- * **MPEG-2 Picture formats**
 - Color formats 4:2:0, 4:2:2, 4:4:4
 - Progressive, interlaced
 - More flexible frame size, more flexible pixel aspect ratio
- * **MPEG-2 Bit rates**
 - „Composite“ quality CCIR-601 at 3-5 Mbit/s
 - Component quality CCIR-601 at 8-10 Mbit/s
 - Variable bit rate, constant bit rate
 - Coded/skipped, motion/ no motion, intra or predicted



PdW / 2017
Fac. EE SPS-VCA

Multimedia Video Coding & A / 5LSE0 /
Module 10 MPEG Mot.-Comp. Coding



MPEG-V. / MPEG-2 Flexibility Extens. – (2)

20

- * **Random access**
 - On slice basis, independent slice processing
- * **Bit stream scalability**
 - Additional layering of information (partitioning)
- * **Compatibility**
 - Backwards to MPEG-1
- * **Editing**
 - Possible in bit stream domain
- * **Stability**
 - Repeated coding resilience



PdW / 2017
Fac. EE SPS-VCA

Multimedia Video Coding & A / 5LSE0 /
Module 10 MPEG Mot.-Comp. Coding



MPEG V. / MPEG-2 Video extensions – (1) ²¹

- * **Interlaced video**
 - Frame or field-based pictures
 - In frame case: extra MB coding options (such as frame/field motion compensation, frame or field DCT)
- * **Hierarchical/scalable coding (optional)**
 - HDTV / TV compatibility
 - MPEG-2 / MPEG-1 compatibility
 - Graceful degradation
 - Solutions: frequency scalability, spatial scalability
- * **Picture format**
 - Parametric specification of colour sampling, colour space

MPEG V. / MPEG-2 Video extensions – (2) ²²

- * MPEG-2 extensions (cont.)
- * **Coding**
 - Alternate quantization tables
 - Alternate VLC tables
 - Added MB types
 - Extended precision for high-quality PQ up to HDTV

MPEG / MPEG-2 Profiles & Levels – (1) ²³

- * **MPEG-2 Profiles / Levels**
 - Implementation of full specification of MPEG-2 too difficult
 - Profiles serve as limited number of subsets of MPEG-2
 - Bounding of encoder/decoder complexity
- * **Profile**
 - Limited subset of entire bit stream syntax
 - Different profiles support different features (applications)
- * **Level**
 - Defined set of constraints imposed on the parameters in the profile bit stream

MPEG / MPEG-2 Profiles & Levels – (2) ²⁴

- * **MPEG-2 profiles / levels**
 - Example: **MP@ML**
- * **Main Profile**
 - sampling 720 x 576, 4:2:0 standard
 - DCT based, frame/field DCT, frame/field MC, B frames
- * **Simple profile**
 - no B pictures are used
- * **Next profile**
 - scalability
 - 4:2:0 or 4:2:2 sampling

MPEG Video / MPEG-2 Profile Table

25

syntactic element	Profile				
	Simple	Main	SNR	Spatial	High
chroma format	4:2:0	4:2:0	4:2:0	4:2:0	4:2:0, 4:2:2
frame rate extens. n	0	0	0	0	0
frame rate extens. d	0	0	0	0	0
picture coding type	I, P	I, P, B	I, P, B	I, P, B	I, P, B
repeat first field	constrained	constrained	no constr.	no constr.	no constr.
sequence table extens.	No	No	Yes	Yes	Yes
scalable mode	-	-	SNR	SNR, spatial	SNR, spatial
spatial scalable extens.	No	No	No	Yes	Yes
intra dc precision	8,9,10	8,9,10	8,9,10	8,9,10	8,9,10,11
slice structure	restricted	restricted	restricted	restricted	restricted

MPEG Video / MPEG-2 Level Table

26

syntactic element	Level			
	Low	Main	High-1440	High
horizontal vector range	-512, +511.5	-1024, +1023.5	-2048, +2047.5	-2048, +2047.5
vertical vector rang (fra.)	-64, +63.5	-128, +127.5	-128, +127.5	-128, +127.5
vertical range (field)	-32, +31.5	-64, +63.5	-64, +63.5	-64, +63.5
max. sample / line	352	720	1440	1920
max. lines / frame	288	576	1152	1152
max. frame / second	30	30	60	60
Y sample rate (Msam/s)	3.041	10.368	47.002	62.669
max. bit rate (Mbit/s)	4	15	60	80
VBV buffer size (Mbit)	0.475	1.835	7.340	9.781

MPEG Video / MPEG-2 Profile-Level

27

Combined overview of MPEG-2 profiles and levels

Level	Profile				
	Simple	Main	SNR	Spatial	High
High		MP@HL			HP@HL
High-1440		MP@H-14		Spatial@H-14	HP@H-14
Main	SP@ML	MP@ML	SNR@ML		HP@ML
Low		MP@LL	SNR@LL		

5LSE0 - Mod 10 Part 3

28

Towards the future...,
Lower bit rate and Video Objects


MPEG Outlook / MPEG-4 – (1)

29

- * Not only bit streams and bit maps
- * Abstract object-oriented multimedia
- * A/V Programs as SW programs
- * Elements can be described independently and combined only at playback time
- * Elements can include stills, digital video, 3D graphics, text, speech
- * Elements can be combined intelligently
 - video texture on 3D objects

MPEG Outlook / MPEG-4 Objects – (2)


30

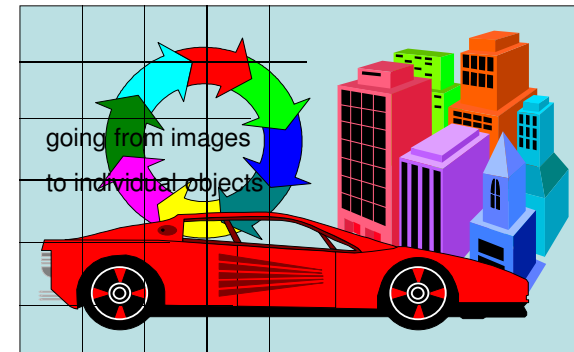

MPEG Outlook / MPEG-4 aspects – (3)

31

- * System aspects and manipulation

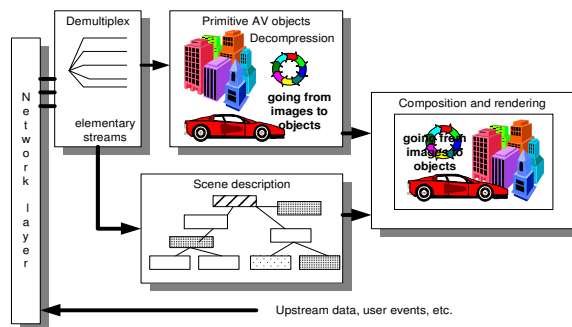

MPEG Coding / Conclusions – (1)

32

- * MPEG-1 provides a suitable platform for 1 Mbit/s applications, whereas **MPEG-2 enables TV up till HDTV** coding and contains many extensions for interlaced images
- * MPEG Video Compression is based on **motion-compensated DCT coding**, with extensive VLC usage of various signal components
- * The **complete specification** for audio, video and data, together with system has resulted in wide acceptance of MPEG-1 and MPEG-2 for many applications
- * MPEG-4 will be the next important step and is based on several developments: Internet, Blu-ray disc, mobile phone

MPEG Coding / Conclusions – (2)

33

- * **MPEG-4 has proven to be the next important step and is more pluriform**
- * **Resulted in several standards due to Internet development**
 - 1. MPEG-4 AVC / H.264 for HDTV-optimized coding on Blu-ray Disc (stream-based decoding)
 - Again Motion-Compensated DCT Coding but optimized
 - Halved bit rate of MPEG-2
 - 2. MPEG-4 Object-Oriented Coding, for low bit-rates and interactive or conditional access to individual parts
 - Objects on Internet (not yet broadly applied)

34